

LM4040-SWLE-FL1

Low energy consumption seawater desalination reverse osmosis membrane elements

Specifications

| | Active Area | | Permeate Flow Rate | | Average Salt Rejection |
|-----------------|-----------------|----------------|--------------------|-------------------|------------------------|
| | ft ² | m ² | GPD | m ³ /d | |
| LM4040-SWLE-FL1 | 78 | 7.2 | 1550 | 5.9 | 99.70 % |

Test conditions: 32000ppm (NaCl) water, 25°C (77°F); 800psi (5.5MPa); 8% recovery

Minimum Salt Rejection CI- (%): 99.60%

Permeate flows variation: +/-15%

Limits (Operating and cleaning)

| | |
|------------------------------|-----------------------|
| pH (infeed) | 2-11 |
| pH (cleaning) | 1-13 |
| Temperature | 45°C (113°F) max. |
| Free Chlorine | 0.1ppm max. |
| SDI | 5 max. |
| Pressure | 1200psi max.(8.27MPa) |
| Single Element Pressure Drop | 15psi (0.10MPa) |

Storage Conditions and Remarks

Always keep new elements in the original packaging

Avoid exposure to direct sunlight

Avoid exposure to chlorine and oxidizing agents


3-year warranty

Oxidation damage is not covered under warranty

Keep elements moist at all times after initial wetting

The initial permeate (first hour) must be discarded

During prolonged system shutdowns, membrane elements must be immersed in preservative solution. The solution must be rinsed out before operation starts again

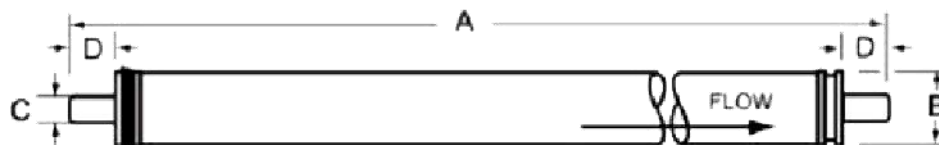

| Model | A/ mm (inch) | B/ mm (inch) | C/ mm (inch) | D/ mm (inch) |
|-----------------|--------------|--------------|--------------|--------------|
| LM4040-SWLE-FL1 | 1016(40) | 99(3.9) | 19.1(0.75) | 26.7(1.05) |

Jiangsu Longmem Technology Co., Ltd.

No.11, Longmen Road, Wujin District, Jiangsu, China

Tel: 86-18706122304 0519-83808880

christina@longmem-tech.com